


EQB SERIES | TANK CLEANING MACHINE

GEAR DRIVEN
FEMALE CONNECTION



Features :

- The powerful rotational solid stream jet effectively cleans the interior of tanks.
- No external power source is required; the rotation is driven solely by the flow of the cleaning liquid.
- Suitable for temp up to 85°C.
- Its compact design allows for easy installation, even in small inlets.
- Easy insertion and removal, as the rotating nozzle is not locked into place.


Technical Data :

- Working pressure: 3 - 7 bar
- Recommended operating pressure: 5 bar
- Impact diameter: max. 7 mtr
- Reach diameter: max. 12 mtr
- Flow rate: 145 LPM to 220 LPM
- Spray angle: 360°
- Operating temperature: max. 85 °C
- Ambient temperature: max. 140 °C (30 min)
- Insertion opening: min. Ø 135 mm
- Materials: SS316, PTFE, PEEK
- Weight: approx. 2.840 kg
- No of Jet : 4 nos
- Driving Mechanism : Gear Driven




Note : We recommend to use 100 - 200 mesh strainer / filter

 E - 360° EQB06.M2.XH	PIPE CONN. SIZE	FLOW CAPACITY IN LPM AT DIFFERENT PRESSURE				NOZZLE ORIFICE DIAMETER (MM)	IMPACT DIAMETER (M)	REACH DIAMETER(M)
	1 1/2"	PRESSURE (BAR)						
		3.0	4.0	5.0	7.0			
	●	145.00	168.00	190.00	220.00	6	7	12

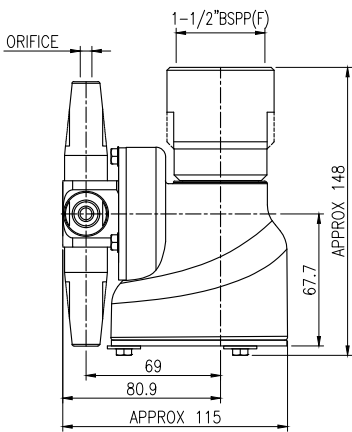

VIEW "A"

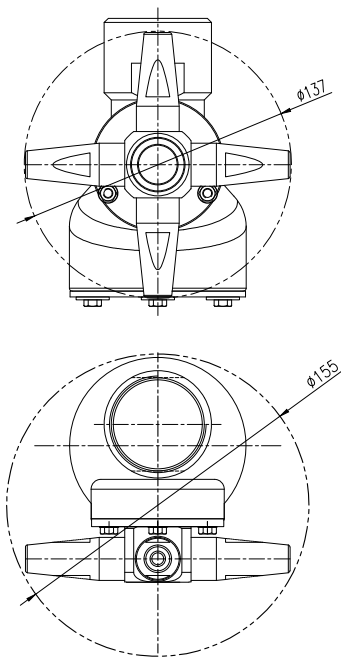

VIEW "B"

